

# 3 HORSEPOWER VERTICAL GRINDERS

## APPLICATIONS

Heavy Duty 3HP vertical grinders have significantly lower vibration levels.

They are used with 6" cup wheels to clean castings, or 7" and 9" depressed center wheels, to smooth welded areas and to successfully handle many additional applications in foundries, fabrication shops, refineries, forge shops, & construction sites.



**HTVG-39**



**HTVG-36**

## STRENGTHS

- Patented Isolation System - reduces vibration to hands and arms of operators; improved productivity and greater safety.
- Isolation system damps vibration using polyurethane elastomer.
- Rugged and durable
- Comfortable hand grips to reduce additional vibration
- Lifetime warranty on heavy duty governor
- Easy maintenance and motor removal
- Safety lockoff lever available
- Hardened motor parts - for lower maintenance costs and longer usage

**HONSA**



**HTVG37-6**  
w/muffler option  
installed  
P/N VGM

Model Number	Weight (lbs.)	Guard Type	Handle
HTVG36-6	10.4	6" Cup	Standard
HTVG36-S-6	10.4	6" Cup	Safety Lockout
HTVG37-6	9.4	7" Depressed Center	Standard
HTVG37-S-6	9.4	7" Depressed Center	Safety Lockout
HTVG39-6	10.2	9" Depressed Center	Standard
HTVG39-S-6	10.2	9" Depressed Center	Safety Lockout

**All 3 horsepower grinders are shipped with 6000rpm governors as standard equipment.** Governors of different speeds are available on request.

Available governed maximum speeds are 3000 rpm, 4500 rpm, 6000 rpm, 8000 rpm.


Governor has a lifetime warranty if governor is not damaged from maintenance procedures.

**WARNING: NEVER USE A SANDER AS A GRINDER. NEVER OPERATE GRINDER WITHOUT GUARD.**

**Standard Equipment:** Wheel Guard, Wrench

**Optional Equipment:** Suspension Bail, Muffler, Pipe-Away Exhaust, Tune-Up Kit, Vacuum Attachment, Water Attachment

# RIGHT ANGLE GRINDERS

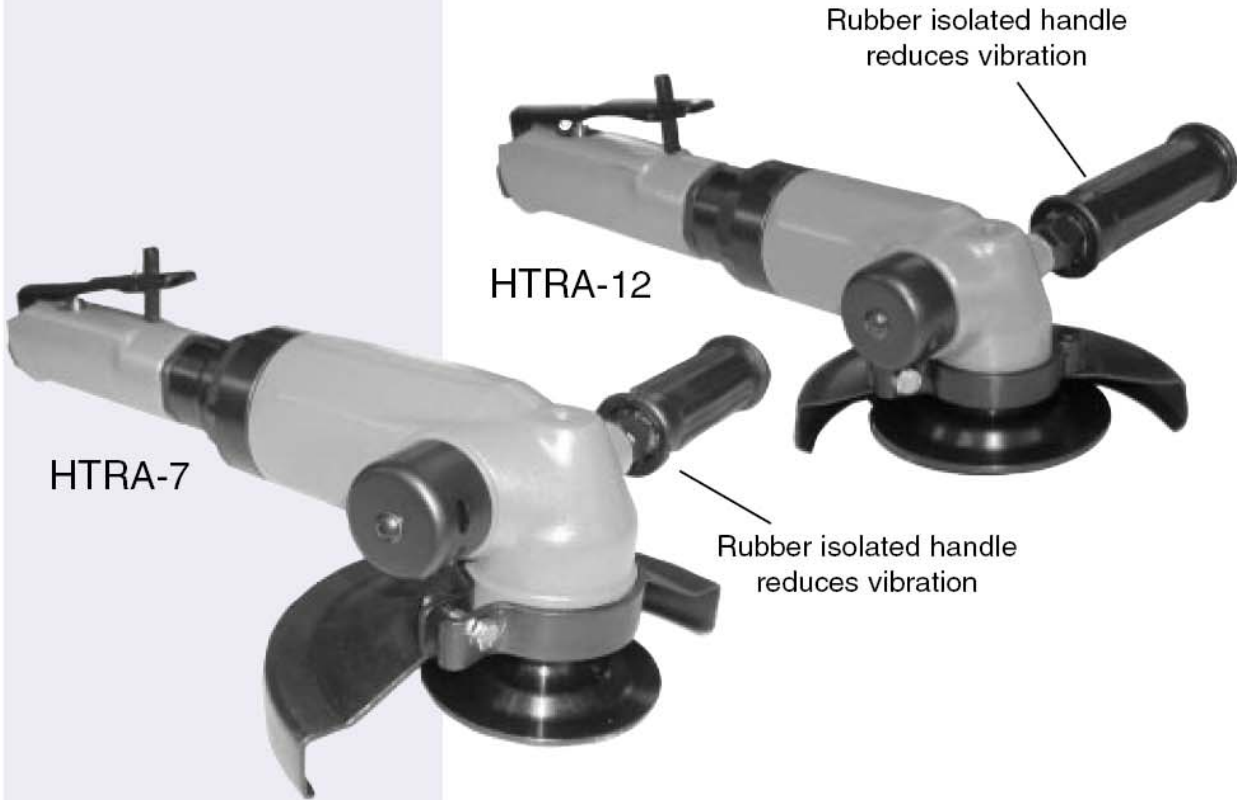

- ***Vibration Reduced***
- ***Patented cooling system for extended gear life***
- ***360 degree rotatable silencer***
- ***Increased Productivity***
- ***Reduced Injuries***

MODEL	WHEEL SIZE	RPM	SPINDLE	LENGTH	H.P.	WEIGHT	AIR CONSUMPTION
HTRA-12	5 inch	12,000	3/8-24	11-1/8	1.3	4.4 lbs	33 CFM
HTRA-7	7 inch	7,000	5/8-11	12-3/32	1.75	7.2 lbs.	49.4 CFM